



# Type T PFA IsolafÂ© Twin Twisted Pair Thermocouple CâfÂçble / Fil (ANSI)

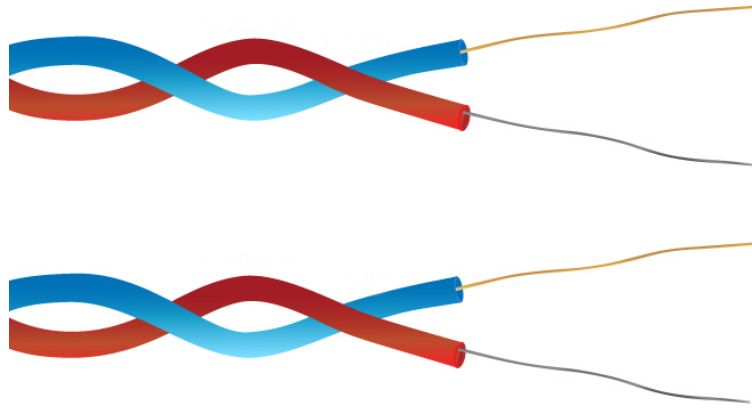


**10m**

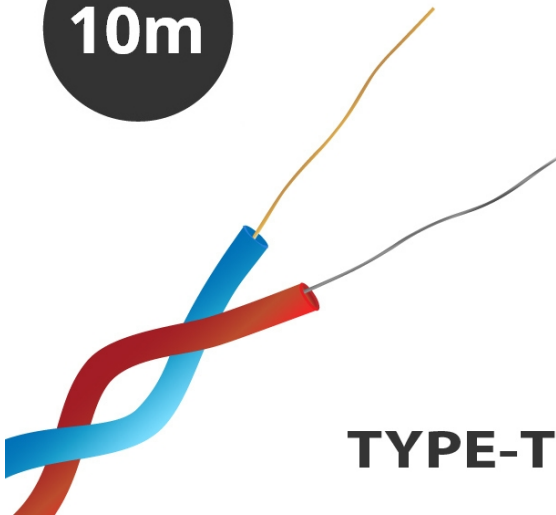

**TYPE-T**

**50M**

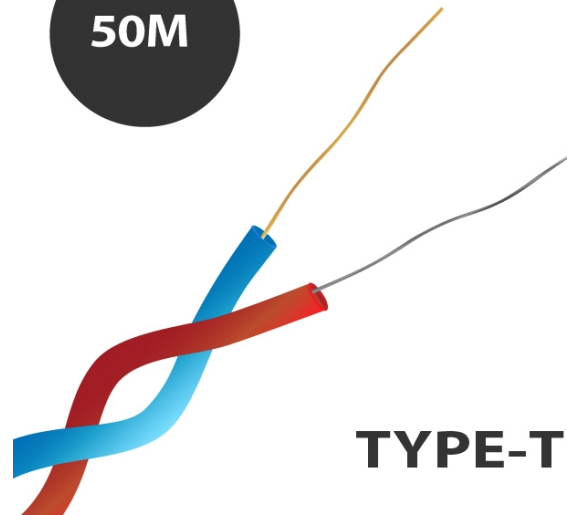

**TYPE-T**

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

**Type T PFA Isolé Twin Twisted Paire Thermocouple Câble / Fil (ANSI)**

PFA Téflon® paire torsadée double pour étendre ou faire des thermocouples simples. PFA Téflon® a une bonne force mécanique et la flexibilité, résistant aux huiles, acides et autres fluides indésirables, gaz, vapeur et pression.

**Spécifications**
**Specifications**

<b>General Description</b>	Resistant to oils, acids other adverse agents and fluids. Good mechanical strength and flexibility.
<b>Cable Length</b>	10m, 25m, 50m, 100m
<b>Cable Type</b>	Single pair of PFA insulated conductors twisted together
<b>Core / Strands</b>	1/0.2mm, 1/0.3mm
<b>Conductor Cross Section 1/0.2 (mm<sup>2</sup>)</b>	0.032
<b>Conductor Cross Section 1/0.315 (mm<sup>2</sup>)</b>	0.078
<b>+ Colour</b>	Blue
<b>- Colour</b>	Red
<b>Drain Wire</b>	No
<b>Insulation Material</b>	PFA Teflon®
<b>Loop Resistance 1/0.2 (Ohms per combined metre)</b>	16.2
<b>Loop Resistance 1/0.315 (Ohms per combined metre)</b>	6.5



<b>Max. Temperature</b>	+260°C
<b>Min. Temperature</b>	-75°C
<b>+ Conductor</b>	Copper
<b>- Conductor</b>	Constantan
<b>Screen</b>	No
<b>Standards Met</b>	Colour code (cores & jacket) to ANSI MC96.1
<b>Thermocouple Type</b>	T
<b>Tolerance</b>	Class 1