



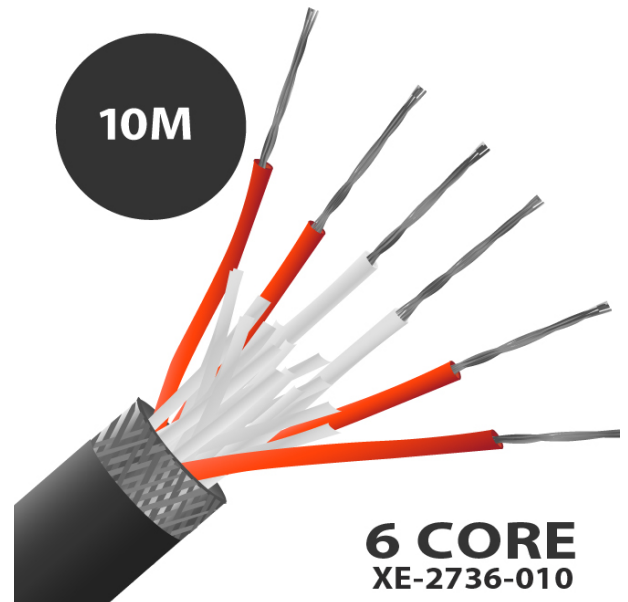

LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

6 core PFA, isolant, écran en cuivre tamponné, câble / fil de capteur PRT

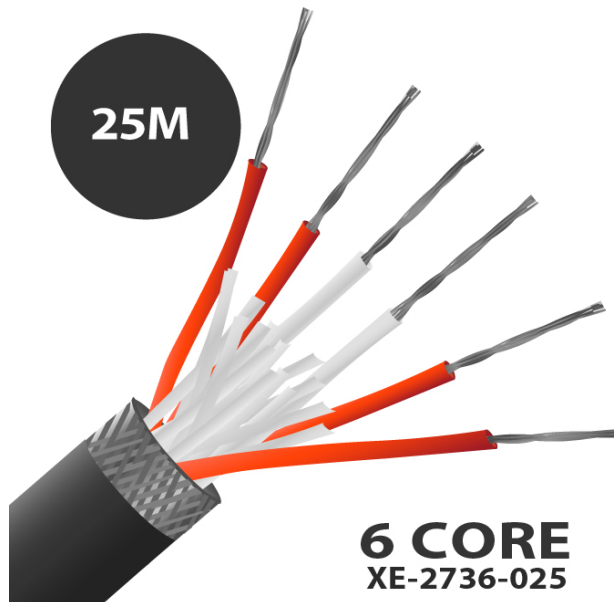

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

6 core PFA isolé, écran en cuivre étamé, câble / fil de capteur PRT

Haute température jusqu'à 260°C, construction en téflon PFA extrudé®. Couramment utilisé pour les thermomètres Pt100?, convient également à d'autres types tels que Pt130, Pt500 et Pt1000?

Spécifications**Specifications**

General Description	PFA insulated 7/0.2mm tin plated copper conductors, twisted cores with nylon cord, tin plated copper braided screen with PFA insulated outer jacket
Cable Length	10, 25m, 50m
Cable Type	PFA Teflon® construction
Core / Strands	7/0.2mm
Insulation Material	PFA Insulated
Max. Temperature	+260°C
Min. Temperature	-75°C
Number of Wires	6
Standards Met	Cores colour coded Red & White in accordance with IEC-751, black outer jacket