


Thermocouple isolation minrale avec pot filet et 100 mm de plomb ANSI double torsad isol PFA - Type K

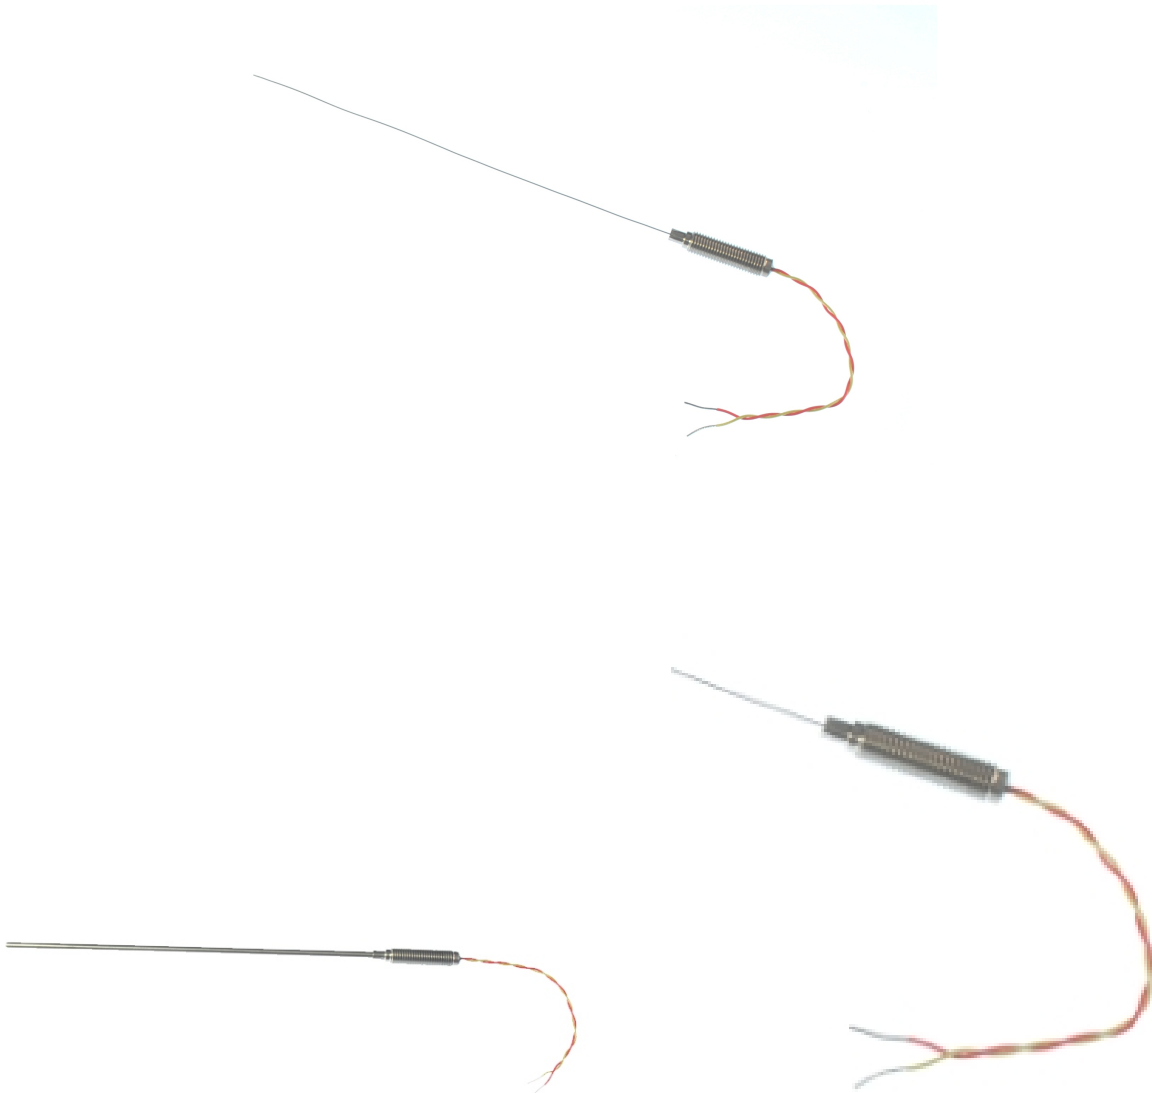

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Vous avez besoin de calibrer votre capteur de température ?

Traable selon les normes dtalonnage ISO17025 (UKAS), Labfacility offre un choix dtalonnage traable en 3 ou 5 points laide de notre installation dtalonnage interne.

Veillez noter que si vous ajoutez une option de calibrage votre commande, vous serez contact pour les informations de livraison.

Spifications**Specifications**

General Description	Highly flexible, sheath can be bent/formed to suit many applications and processes
Thermocouple Type	K
Thermocouple Junction	Insulated hot junction
Probe Diameter	Diameters include 1.0, 1.5, 3.0 & 6.0mm
Sheath Material	Choice of 310 stainless steel or Inconel® Alloy 600 sheath
Pot Type	M8 x 1.0mm fine pitch threaded pot seal (200°C)
Cable Length	100mm
Cable Type	PFA twin twisted
Core / Strands	7/0.2mm
Cable Termination	Bare tails
Max. Temperature	+1100°C (+750°C for 1.0mm)
Standards Met	colour coded to ANSI MC96.1.